

# HEMODYNAMIC EFFECT OF PATENT DUCTUS ARTERIOSUS (PDA)

MOHAMAD IKHWAN BIN KORI

A project report submitted in partial fulfilment of the  
requirement for the award of the degree of  
Master of Engineering (Mechanical)

Faculty of Mechanical Engineering  
Universiti Teknologi Malaysia

JANUARY 2015

To my beloved parents, siblings and friends

Thank you for all the support, sacrifice and encouragement throughout this journey

## **ACKNOWLEDGEMENT**

Firstly, I would like to express my gratitude and appreciation to my supervisor, Assoc. Prof. Dr. Kahar bin Osman, for his continuous supervision, guidance, support and encouragement throughout the progress of the project. Thank you for all the advice given, which helped me a lot especially for CFD simulation work.

I am also very thankful to Computational Fluid Mechanics Laboratory (CFM Lab) team members, for all the continuous support and guidance with helpful insights on modelling and CFD simulations.

I would like to express my utmost gratitude to my family for continually supporting me throughout the progress of my study. Finally, I would like to express my thankfulness to all those who have contributed either directly or indirectly with this project.

## ABSTRACT

Patent ductus arteriosus (PDA) is a condition in which the patent ductus arteriosus remain patent after birth, causing the blood to shunt through the ductus arteriosus. Thus it is very crucial to determine the flow conditions while the shunting process is outgoing. The objective of this research is to identify the abnormality of hemodynamic which includes the flow rate percentage in different PDA morphologies. Three patient-specific PDA morphologies have been identified and modelled using MIMICS and Solidworks. The blood flow inside the PDA morphologies are investigated numerically using ANSYS CFX 14.0. Four criteria have been identified which are the flow characteristic, time-averaged wall shear stress (TAWSS), oscillatory shear index and mass flow rate. Flow recirculation with low velocity and low TAWSS has been identified at the proximal wall of the aortic branches and PDA, and the region of the insertion of PDA at pulmonary artery. High velocity blood flow and high TAWSS mainly focused on the distal wall of the aortic branches and PDA, and the distal of pulmonary artery, after the insertion of PDA to the pulmonary artery. High OSI value is identified at outer wall of the ascending aorta, at the PDA wall and at the pulmonary artery, especially at the region of the insertion of PDA at the artery and the distal of the left pulmonary artery. DS LPA has the highest percentage of wall area covered by OSI larger than 0.2, approximately around 50%. Lastly the PDA morphologies simulated exhibit a left-to-right shunt, which diverts approximately 10% of blood flow from the aorta to the pulmonary artery. The highest shunted blood flow is found in TR LPA morphology.

## ABSTRAK

Ductus arteriosus terbuka (PDA) adalah keadaan di mana ductus arteriosus kekal terbuka apabila bayi sudah lahir, menyebabkan aliran darah dipintas dari aorta ke arteri pulmonari melalui ductus arteriosus. Oleh sebab itu, keadaan aliran darah perlu dikenalpasti sementara proses pintasan aliran darah ini berlaku. Objektif kajian ini adalah untuk mengenalpasti kesan aliran darah, termasuklah jumlah darah per unit masa yang melalui PDA bagi setiap geometri. Tiga geometri PDA dari pesakit telah dikenalpasti dan geometri tersebut dimodel menggunakan MIMICS dan Solidworks. Analisis kesan aliran darah ini menggunakan kaedah berangka melalui “*Computational Fluid Dynamics*” dengan menggunakan perisian ANSYS CFX 14.0. Empat kriteria telah dikenalpasti iaitu ciri aliran, purata masa tegasan ricih dinding (TAWSS), indeks ayunan ricih (OSI) dan kadar aliran darah. Aliran darah balik semula yang mempunyai nilai TAWSS rendah dikenalpasti di bahagian dinding proksimal cabang aorta dan PDA, dan kawasan di mana PDA dan arteri pulmonari bercantum. Aliran darah dengan halaju tinggi dan TAWSS yang tinggi tertumpu di bahagian dinding distal cabang aorta dan PDA, dan distal arteri pulmonari, selepas kawasan di mana PDA dan arteri pulmonari bercantum. Bacaan OSI yang tinggi tertumpu di dinding luar aorta menaik, dinding PDA dan di arteri pulmonari. Kawasan di arteri pulmonari tertumpu pada kawasan PDA dan arteri pulmonari bercantum, dan pada distal arteri pulmonari kiri. Peratusan luas kawasan pada dinding yang tertinggi untuk OSI lebih daripada 0.2 adalah pada DS LPA iaitu dalam lingkungan 50%. Semua geometri PDA dikenalpasti mempunyai pintasan dari kiri ke kanan, di mana aliran darah dipintas dari aorta ke arteri pulmonari adalah dalam lingkungan 10%. Aliran darah yang paling banyak dipintas adalah pada TR LPA.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBREVIATION	xiii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Problem Statement	2
	1.2 Research Objective	2
	1.3 Significant of Study	2
	1.4 Scope of Research	3
	1.5 Theoretical Framework	3
	1.6 Organization of Thesis	3
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>4</b>
	2.1 Patent Ductus Arteriosus (PDA)	4
	2.1.1 Anatomy of PDA	4
	2.1.2 Physiology of PDA	5
	2.1.3 Mechanism of Normal Closure	6
	2.1.4 Hemodynamic Impact of PDA	6

2.2 Morphology of PDA	9
2.2.1 Geometry of PDA	9
2.2.2 Origin of PDA	12
2.2.3 Site of insertion at pulmonary end of PDA	13
2.2.4 Disconnected pulmonary arteries	13
2.2.5 Summary of morphology	14
2.3 Flow analysis on PDA	15
2.4 Velocity and pressure tracings	17
2.5 Hemodynamic parameters	19
2.5.1 Wall shear stress	19
2.5.2 Oscillatory shear index	19
2.6 Geometry generation	20
<b>3 RESEARCH METHODOLOGY</b>	<b>22</b>
3.1 Introduction	22
3.2 Flow Chart	23
3.3 Geometry of Patent Ductus Arteriosus	24
3.3.1 PDA morphologies	25
3.3.2 Three dimensional (3D) model of PDA	26
3.4 Computational Fluid Dynamics (CFD) modelling	29
3.4.1 Geometry Meshing	29
3.4.2 Boundary Conditions	30
3.4.3 Mathematical Modelling	32
3.5 Data Analysis	32
3.5.1 Time-averaged wall shear stress (TAWSS)	32
3.5.2 Oscillatory shear index (OSI)	33
3.5.3 Mass flow rate	33
<b>4 RESULTS AND DISCUSSION</b>	<b>35</b>
4.1 Overview	35
4.2 Grid independent test	35
4.3 Flow characteristic in PDA morphology	37
4.4 Time-averaged wall shear stress	38

	4.5 Oscillatory shear index	44
	4.6 Mass flow rate	47
<b>5</b>	<b>CONCLUSION</b>	50
	5.1 Conclusion	50
	5.2 Recommendation	51
	<b>REFERENCES</b>	52
	Appendix A	56



**LIST OF TABLES**

<b>TABLE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
3.1	Demographic data on PDA patients	25
3.2	Summary on the PDA morphologies	28
3.3	Blood properties	31
4.1	Maximum velocity in PDA at peak systole (0.06s)	41
4.2	Percentage area covered by OSI range	44
4.3	Percentage of blood shunted through PDA	49

## LIST OF FIGURES

<b>FIGURE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
2.1	Schematic of fetal heart	4
2.2	Percentage of CVO	5
2.3	The aorta, ductus arteriosus and pulmonary artery in infant with congenital heart disease	8
2.4	General variation of PDA configuration with the lateral angiogram images as stated by Kerichinko et al	10
2.5	Variable shapes and configurations of PDA in CHD	11
2.6	Various origins of PDA arising from the aorta	12
2.7	PDA-related branch pulmonary artery stenosis and “pulmonary coarctation.”	13
2.8	Disconnected pulmonary arteries and bilateral PDA in a patient with TOF-PA.	14
2.9	PDA morphology characterization	15
2.10	Instantaneous 3D fetal aortic flows of idealized CFD models of the normal and 3 common congenital heart defect templates during mid-deceleration phase	16
2.11	Model simulation result	18
3.1	Flow chart of research	23
3.2	Section of Aorta	24
3.3	Pulmonary arteries	25
3.4	CT images of PDA morphology	27
3.5	CT image to CAD model procedure	27
3.6	Mesh of computational domain	29
3.7	Inlet and outlet boundary conditions for simulation	30

3.8	Inlet aorta and MPA velocity profile	31
4.1	Line A is used to compare the velocity of different mesh sizes	36
4.2	Velocity vs. length along the Line A	36
4.3	Velocity streamline for each morphology	39
4.4	Velocity contour at ZX plane at (a) brachiocephalic artery (b) carotid artery (c) subclavian artery, and (d) PDA	40
4.5	Normalized Time- Average Wall Shear Stress (TAWSS)	43
4.6	Oscillatory Shear Index	46
4.7	Outflow mass flow rate percentage	48

## LIST OF ABBREVIATION

AS	-	Ascending aorta
CFD	-	Computational Fluid Dynamics
CHD	-	Congenital heart disease
CT	-	Computer tomography
CVO	-	Combined ventricular output
DS	-	Descending aorta
IJN	-	Institut Jantung Negara (National Heart Institute)
LAC	-	Left aortic arch
LES	-	Large eddy simulation
LPA	-	Left pulmonary artery
$\dot{m}$	-	Mass flow rate
m/s	-	meter per second
MPA	-	Main pulmonary artery
OSI	-	Oscillatory shear index
$p$	-	Pressure
PDA	-	Patent Ductus Arteriosus
RPA	-	Right pulmonary artery
$\tau_w$	-	Wall shear stress
TAWSS	-	Time-averaged wall shear stress
TR	-	Transverse aorta
$\mathbf{u}$	-	Velocity vector
$\mu$	-	Viscosity
$\rho$	-	Density

## **CHAPTER 1**

### **INTRODUCTION**

Ductus arteriosus is a normal fetal blood vessel which connecting the aorta to the pulmonary artery. Before birth, ductus arteriosus acts as a shunt to redirect blood from the fetal blood circulation, obtained from the umbilical cord, to the aorta in order to supply oxygenated blood to the fetal body, as the lungs is not functioning at this stage. Upon birth, the vessel is no longer needed, as the lungs are already functioning. Thus the ductus arteriosus will close by itself within the first few days.

However, there is condition which the ductus arteriosus does not close and remain patent after few days. This condition is called patent ductus arteriosus (PDA). If the ductus remain patent, the flow of blood reversed. Some of the blood flow is shunted from the aorta to the pulmonary artery and recirculated to the lungs. This condition may cause the heart to work harder in order to supply the blood to the whole body and may congested the lungs with blood. In the case of patient with complex cyanotic congenital heart disease (CHD) with duct-dependent pulmonary circulation, patenting the ductus arteriosus acts as a palliative measure before conduit cavopulmonary angioplasty takes place after 6 to 12 months after birth. Maintaining the patency of the ductus arteriosus using stent have been introduced and proven to be lifesaving.

## **1.1 Problem Statement**

Since the morphology of PDA is different for each patient, the characteristic of flow inside the morphology and the effect of various geometry of PDA morphologies to the flow characteristic inside the PDA is not fully understood. Due to the complicated nature of the arterial geometry, researchers chose to use simplified model of the aorta, PDA and pulmonary arteries geometries in computational fluid dynamics (CFD) simulations.

Since the PDA acts as a shunt which diverts the blood flow, there will be changes of blood flow rate inside the aorta and the pulmonary artery, thus changing the distribution of blood to the body and lungs. The changes of the flow distribution compared to normal may cause complications to the patient, such as cyanosis or lung congestion and the flow distribution is different with different type of morphology.

## **1.2 Research Objectives**

1. To identify the hemodynamic effect due to the abnormality of flow in PDA for different morphologies
2. To determine the percentages of blood flow rate in PDA for different morphologies.

## **1.3 Significant of study**

The behavior of arterial hemodynamic on PDA is analyzed as a comparative study among all morphologies. This study will become a basis of designing a suitable medical devices that can be used for PDA applications. The study of flow rate inside the PDA morphologies will help medical practitioner to decide the suitable treatment of cyanotic congenital heart disease, which may reduce the morbidity and mortality to the patient.

## 1.4 Scope of research

1. Only three morphologies of PDA are investigated
2. Normal-structured PDA morphologies with no tortuosity are considered
3. Transient flow is considered.

## 1.5 Theoretical Framework

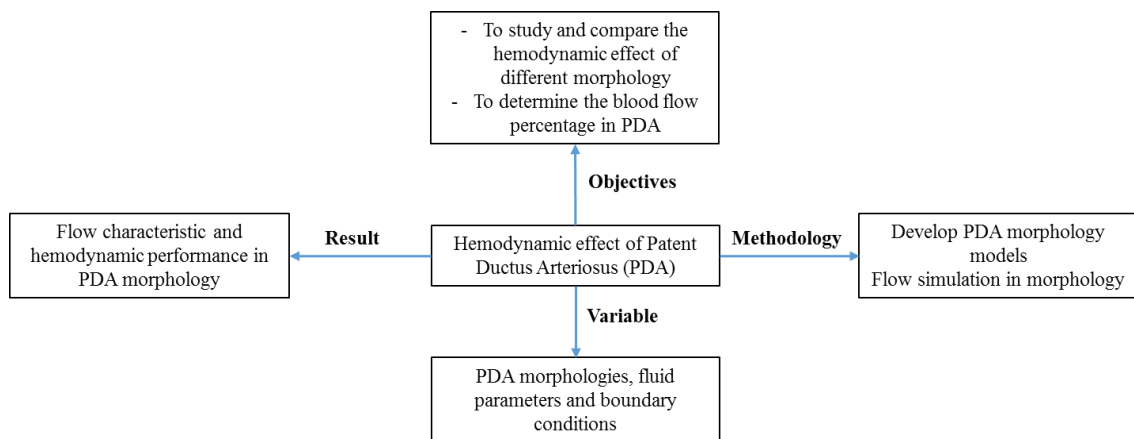


Figure 1.1: Theoretical framework of the study

## 1.6 Organization of thesis

Chapter one consists of the introduction and the background of the study, followed by chapter two which discusses on the relevant literature review. Chapter three details on the research methodology that will be used for this study, followed by chapter four presents the result obtained from the completed simulation runs and several discussions related to the results are made. Chapter five concludes the study and recommendation for future improvements are identified.

## REFERENCES

1. D. J. Schneider and J. W. Moore, "Patent ductus arteriosus.," *Circulation*, vol. 114, no. 17, pp. 1873–82, Oct. 2006.
2. D. J. Schneider, "The patent ductus arteriosus in term infants, children, and adults.," *Semin. Perinatol.*, vol. 36, no. 2, pp. 146–53, Apr. 2012.
3. V. Gournay, "The ductus arteriosus: physiology, regulation, and functional and congenital anomalies.," *Arch. Cardiovasc. Dis.*, vol. 104, no. 11, pp. 578–85, Nov. 2011.
4. Ductus arteriosus definition - Medical Dictionary: Definitions of Popular Terms Defined on MedTerms." [Online]. Available: <http://www.medterms.com/script/main/art.asp?articlekey=3128>. [Accessed: 25-Aug-2014].
5. M. S. LeRoy RN, "Patent Ductus Arteriosus | CS Mott Children's Hospital: University of Michigan Health System," 2012. [Online]. Available: <http://www.mottchildren.org/medical-services/ped-heart/conditions/patent-ductus-arteriosus>. [Accessed: 17-Aug-2014].
6. K. J. Crossley, B. J. Allison, G. R. Polglase, C. J. Morley, P. G. Davis, and S. B. Hooper, "Dynamic changes in the direction of blood flow through the ductus arteriosus at birth.," *J. Physiol.*, vol. 587, no. Pt 19, pp. 4695–704, Oct. 2009.
7. J. Murphy, "Comparison of Stent Designs using Computational Fluid Dynamics Comparison of Stent Designs Using Computational," 2007.
8. P. J. Murphy, "The fetal circulation," *Contin. Educ. Anaesthesia, Crit. Care Pain*, vol. 5, no. 4, pp. 107–112, Aug. 2005.
9. M. A. Bakhshali, M. Mafi, and S. Daneshvar, "Mathematical modelling of the patent ductus arteriosus (PDA)," *Math. Comput. Model. Dyn. Syst.*, vol. 19, no. 3, pp. 238–249, Jun. 2013.
10. V. L. Vida, S. Spegiorin, N. Maschietto, M. a Padalino, C. Tessari, R. Biffanti, A. Cerutti, O. Milanese, and G. Stellin, "Cardiac operations after patent ductus arteriosus stenting in duct-dependent pulmonary circulation.," *Ann. Thorac. Surg.*, vol. 90, no. 2, pp. 605–9, Aug. 2010.



11. M. Alwi, "Stenting the patent ductus arteriosus in duct-dependent pulmonary circulation: techniques, complications and follow-up issues," *Future Cardiol.*, vol. 8, no. 2, pp. 237–250, 2012.
12. D. E. Boshoff, I. Michel-behnke, and D. Schranz, "Stenting the neonatal arterial duct," pp. 893–901, 2007.
13. M. Alwi and M. Che Mood, "Stenting of Lesions in Patent Ductus Arteriosus with Duct-Dependent Pulmonary Blood Flow: Focus on Case Selection, Techniques and Outcome," *Interv. Cardiol. Clin.*, vol. 2, no. 1, pp. 93–113, 2013.
14. K. Pekkan, L. P. Dasi, P. Nourparvar, S. Yerneni, K. Tobita, M. a Fogel, B. Keller, and A. Yoganathan, "In vitro hemodynamic investigation of the embryonic aortic arch at late gestation.," *J. Biomech.*, vol. 41, no. 8, pp. 1697–706, Jan. 2008.
15. A. T. Setchi, J. H. Siggers, K. H. Parker, and A. J. Mestel, "Mathematical Modeling of Two-Dimensional Flow through Patent Ductus
16. A. Setchi, a J. Mestel, J. H. Siggers, K. H. Parker, M. W. Tan, and K. Wong, "Mathematical model of flow through the patent ductus arteriosus.," *J. Math. Biol.*, vol. 67, no. 6–7, pp. 1487–506, Dec. 2013.
17. M. S. Spach, G. a. Serwer, P. a. Anderson, R. V. Canent, and a. R. Levin, "Pulsatile aortopulmonary pressure-flow dynamics of patent ductus arteriosus in patients with various hemodynamic states," *Circulation*, vol. 61, no. 1, pp. 110–122, Jan. 1980.
18. L. Morris, P. Delassus, a. Callanan, M. Walsh, F. Wallis, P. Grace, and T. McGloughlin, "3-D Numerical Simulation of Blood Flow Through Models of the Human Aorta," *J. Biomech. Eng.*, vol. 127, no. 5, p. 767, 2005.
19. a. D. Caballero and S. Laín, "A Review on Computational Fluid Dynamics Modelling in Human Thoracic Aorta," *Cardiovasc. Eng. Technol.*, vol. 4, no. 2, pp. 103–130, Apr. 2013.
20. I. Taib, M. R. A. Kadir, M. H. S. A. Azis, A. Z. Md Khudzari, and K. Osman, "Analysis of Hemodynamic Differences for Stenting Patent Ductus Arteriosus," *J. Med. Imaging Heal. Informatics*, vol. 3, no. 4, pp. 555–560, Dec. 2013.
21. N. Duraiswamy, R. T. Schoepfoerster, and J. E. Moore Jr., "Comparison of Near-Wall Hemodynamic Parameters in Stented Artery Models," vol. 131, no. 6, pp. 1–22, 2010.

22. G. Pennati, M. Bellotti, and R. Fumero, "Mathematical modelling of the human foetal cardiovascular system based on Doppler ultrasound data.," *Med. Eng. Phys.*, vol. 19, no. 4, pp. 327–35, Jun. 1997.
23. C. Cheng, F. Helderma, D. Tempel, D. Segers, B. Hierck, R. Poelmann, A. van Tol, D. J. Duncker, D. Robbers-Visser, N. T. C. Ursem, R. van Haperen, J. J. Wentzel, F. Gijzen, A. F. W. van der Steen, R. de Crom, and R. Krams, "Large variations in absolute wall shear stress levels within one species and between species.," *Atherosclerosis*, vol. 195, no. 2, pp. 225–35, Dec. 2007.
24. J. Murphy and F. Boyle, "Predicting neointimal hyperplasia in stented arteries using time-dependant computational fluid dynamics: a review.," *Comput. Biol. Med.*, vol. 40, no. 4, pp. 408–18, Apr. 2010.
25. F. P. Glor, B. Ariff, a D. Hughes, L. a Crowe, P. R. Verdonck, D. C. Barratt, S. a M. Thom, D. N. Firmin, and X. Y. Xu, "Image-based carotid flow reconstruction: a comparison between MRI and ultrasound," *Physiol. Meas.*, vol. 25, no. 6, pp. 1495–1509, Dec. 2004.
26. A. Ceballos, A. J. Kassab, E. A. Divo, R. D. Osorio, R. A.- Morales, and W. M. Decampoli, "A Multiscale Model of the Neonatal Circulatory System Following Hybrid Norwood Palliation," pp. 3–10.
27. J. F. LaDisa, L. E. Olson, I. Guler, D. a Hettrick, S. H. Audi, J. R. Kersten, D. C. Warltier, and P. S. Pagel, "Stent design properties and deployment ratio influence indexes of wall shear stress: a three-dimensional computational fluid dynamics investigation within a normal artery.," *J. Appl. Physiol.*, vol. 97, no. 1, pp. 424–30; discussion 416, Jul. 2004.
28. J. Lantz, J. Renner, and M. Karlsson, "Wall shear stress in a subject specific human aorta - Influence of fluid-structure interaction," no. 3, pp. 759–778, 2011.
29. X. Liu, A. Sun, Y. Fan, and X. Deng, "Physiological Significance of Helical Flow in the Arterial System and its Potential Clinical Applications.," *Ann. Biomed. Eng.*, Aug. 2014.
30. P. Vasava, P. Jalali, M. Dabagh, and P. J. Kolari, "Finite element modelling of pulsatile blood flow in idealized model of human aortic arch: study of hypotension and hypertension.," *Comput. Math. Methods Med.*, vol. 2012, p. 861837, Jan. 2012.
31. K. W. Olsson, A. Jonzon, and R. Sindelar, "A high ductal flow velocity is associated with successful pharmacological closure of patent ductus arteriosus in infants 22-27 weeks gestational age.," *Crit. Care Res. Pract.*, vol. 2012, no. January 2006, p. 715265, Jan. 2012.

32. D. Fytanidis, J. Soulis, and G. Giannoglou, "Patient-specific arterial system flow oscillation," *Hippokratia*, pp. 162–165, 2014.
33. A. Gnasso, C. Irace, C. Carallo, M. S. De Franceschi, C. Motti, P. L. Mattioli, and A. Pujia, "In Vivo Association Between Low Wall Shear Stress and Plaque in Subjects With Asymmetrical Carotid Atherosclerosis," *Stroke*, vol. 28, no. 5, pp. 993–998, May 1997.
34. J. Murphy and F. Boyle, "Predicting neointimal hyperplasia in stented arteries using time-dependant computational fluid dynamics: a review.," *Comput. Biol. Med.*, vol. 40, no. 4, pp. 408–18, Apr. 2010.
35. "Patent Ductus Arteriosus. PDA information | Patient.co.uk." [Online]. Available: <http://www.patient.co.uk/doctor/patent-ductus-arteriosus>. [Accessed: 19-Dec-2014].
36. A. How, "Patent Ductus Arteriosus ( PDA ) Patent Ductus Arteriosus ( PDA )," pp. 1–2, 2009.